



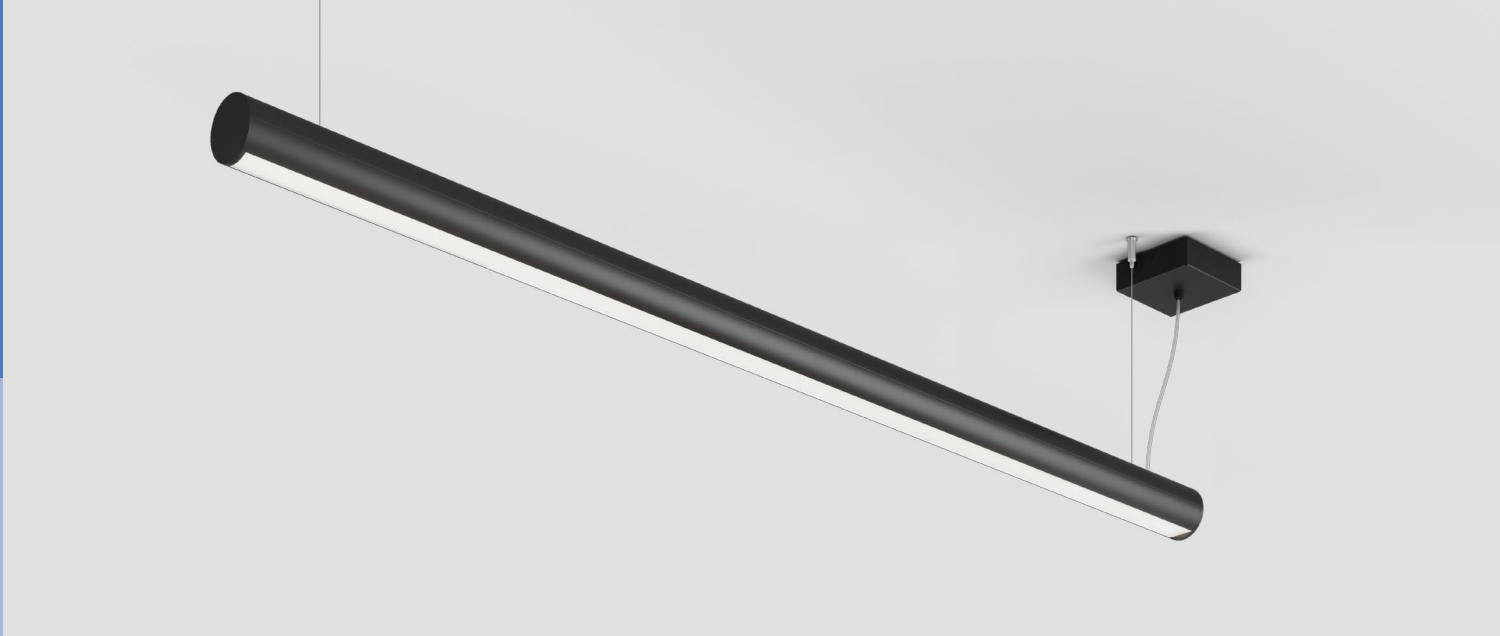

Line 75 Oval Diffusers

EN The Line 75 Oval Diffusers optimize lighting environments with their high efficiency and versatile features, offering reduced glare and energy savings. They provide consistent light distribution across a variety of spaces and blend effortlessly into different design schemes, with customizable housing in any RAL color. Users can adjust lighting to their preferences by selecting either microprismatic or opal diffusers and choosing from three different output levels and color temperatures. With interchangeable lenses in black, white, and silver, these luminaires offer great adaptability, making them ideal for numerous applications.

DE Die ovalen Diffusoren der Linie 75 optimieren Lichtumgebungen durch ihre hohe Effizienz und ihre vielseitigen Eigenschaften, die Blendungsreduzierung und Energieeinsparungen ermöglichen. Sie sorgen für eine gleichmäßige Lichtverteilung in einer Vielzahl von Räumen und fügen sich mühelos in verschiedene Designschemata ein, mit einem anpassbaren Gehäuse in jeder RAL-Farbe. Die Benutzer können die Beleuchtung an ihre Vorlieben anpassen, indem sie entweder mikroprismatische oder opale Diffusoren auswählen und zwischen drei verschiedenen Leistungsstufen und Farbtemperaturen wählen. Mit austauschbaren Linsen in Schwarz, Weiß und Silber bieten diese Leuchten eine große Anpassungsfähigkeit und sind damit ideal für zahlreiche Anwendungen.



size	light	system power standard	luminous flux 4000K, opal
564 mm ■ 08	2 ft	↓9.8W / ↑4.9W	↓937lm / ↑520lm
844 mm ■ 12	3 ft	↓14.7W / ↑9.8W	↓1406lm / ↑1040lm
1124 mm ■ 16	4 ft	↓19.6W / ↑14.7W	↓1874lm / ↑1559lm
1404 mm ■ 20	5 ft	↓24.5W / ↑19.6W	↓2343lm / ↑2079lm
1684 mm ■ 24	6 ft	↓29.4W / ↑24.5W	↓2811lm / ↑2599lm
1964 mm ■ 28	7 ft	↓34.3W	↓3280lm
2244 mm ■ 32	8 ft	↓39.2W	↓3748lm
2524 mm ■ 36	9 ft	↓44.1W	↓4217lm
2804 mm ■ 40	10 ft	↓49W	↓4686lm
3084 mm ■ 44	11 ft	↓53.9W	↓5154lm
3364 mm ■ 48	12 ft	↓58.8W	↓5622lm

Technical information



UGR	<19 / <25			
lighting power	low	~ 1		
	standard	~ 2		
	high	~ 3		
mounting type	surface	+ 1		
	pendant	+ 2		
	pendant up & down	+ 3		
light distribution – down	60° mprm			
	120° opal			
luminous efficiency	LO	ST	HI	
	mpm	94lm/W	90lm/W	86lm/W
	opal	99lm/W	95lm/W	91lm/W
electrical control	ON / OFF	▲ 9		
	DALI	▲ 8		
color temperature	3000K	● 3		
	4000K	● 4		
	on request: TUNABLE WHITE	● 9		
housing color	black 9005	■ 01		
	white 9010	■ 02		
	on request: RAL color palette	■ 99		
optics	opal	■ 1		
	microprismatic	■ 2		
	blind cover	■ 9		

* Photometric data: 4 ft, 4000K, CRI 90

