

Circly

EN Circly is a classic circular ceiling luminaire designed for modern office interiors. The microprismatic cover ensures visual comfort and excellent working conditions, while the discreet indirect light distribution provides soft, uniform ceiling illumination. Circly features a complete circular LED PCB, delivering improved efficiency of 140 lm/W. Available in Ø450 mm with 702 LEDs and Ø600 mm with 1248 LEDs, the luminaire offers high-quality, comfortable light for professional environments. DIP switches allow flexible adjustment of power, colour temperature and indirect light on/off control. With UGR <19 and a wide light distribution (↑95°/↓95°), Circly is a refined office luminaire that combines performance, simplicity, and everyday comfort.

DE Circly ist eine klassische, runde Deckenleuchte, die speziell für moderne Büroräume entwickelt wurde. Die mikroprismatische Abdeckung mit einem UGR-Wert <19 gewährleistet Sehkomfort und optimale Arbeitsbedingungen, während die dezente indirekte Lichtverteilung für eine weiche, gleichmäßige Deckenbeleuchtung sorgt. Circly verfügt über eine vollständig runde LED-Leiterplatte und bietet eine verbesserte Lichtausbeute von 140 lm/W. DIP-Schalter ermöglichen die flexible Einstellung der Leistung, der Farbtemperatur sowie der Ein- und Ausschaltung des indirekten Lichts.

Example

Circly	standard power	4000 K	microprismatic		no textil
↑	↑	↑	↑		↑
3102	– 01 – 2	– 8	– 4 – 01	– 11 – 3	– 00
	↓	↓	↓	↓	
	Circly Ø450	DALI	luminaire black 9005	pendant up & down	

Quickinfo

		Circly 450 ■ 01	Circly 600 ■ 02
luminaire size		Ø450×83	Ø600×83
system power switchable	ST	30 W (↑9 W / ↓21 W)	48 W (↑14 W / ↓34 W)
	HI	40 W (↑12 W / ↓28 W)	60 W (↑18 W / ↓42 W)
luminos flux	ST	3900 lm (↑1300 lm / ↓2600 lm) (30 W)	6720 lm (↑1800 lm / ↓3940 lm) (48 W)
	HI	5200 lm (↑1700 lm / ↓3500 lm) (40 W)	8400 lm (↑2300 lm / ↓6100 lm) (60 W)
luminous efficiency		130 lm/W	140 lm/W
light distribution – down		95°	
light distribution – up		95°	

Technical information

IP20 · <19 UGR · SDCM 3 · ~230V


lighting power	standard	~ 2
	high	~ 3
electrical control	ON / OFF	▲ 9
on request:	on request DALI	▲ 8
color temperature switchable	3000 K	● 3
	4000 K	● 4
luminaire color	black 9005	⬟ 01
	white 9010	⬟ 02
mounting type	surface	◖ 1
	pendant	◖ 2
	pendant up & down	◖ 3

Create my unique code!


3102 – ■ – ~ – ▲ – ● – ⬟ – 11 – ◖ – 00



HUMAN OFFICE SHOWROOM

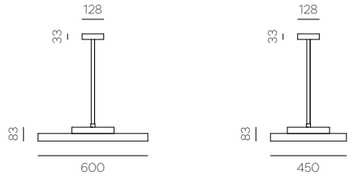

light distribution DOWN



light distribution UP & DOWN

