


Line 75 Oval

The Line 75 Oval family combines advanced functionality and sleek aesthetics, ideal for a range of spaces from conference rooms to workstations. These luminaires offer high efficiency with reduced glare, energy savings, and uniform light distribution. Users can personalize the lighting experience with various output levels, and color temperatures. Customizable RAL color housing and interchangeable lenses in black, white, or silver make them adaptable to any design scheme. The Line 75 Oval's durable, powder-coated frame and precise illumination ensure a cohesive, refined appearance across all applications.

Choose your optics!

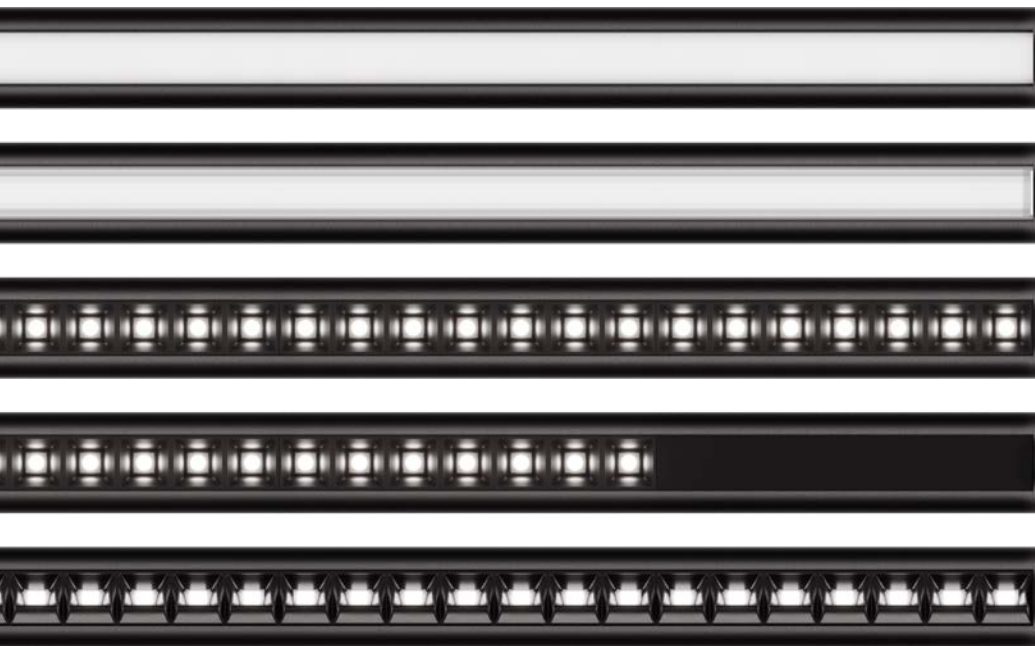

Opal Diffuser


Microprismatic Diffuser

Dark Optic

Blind Cover

Wall Washer

... and the reflector color if your choice was Dark Optic:

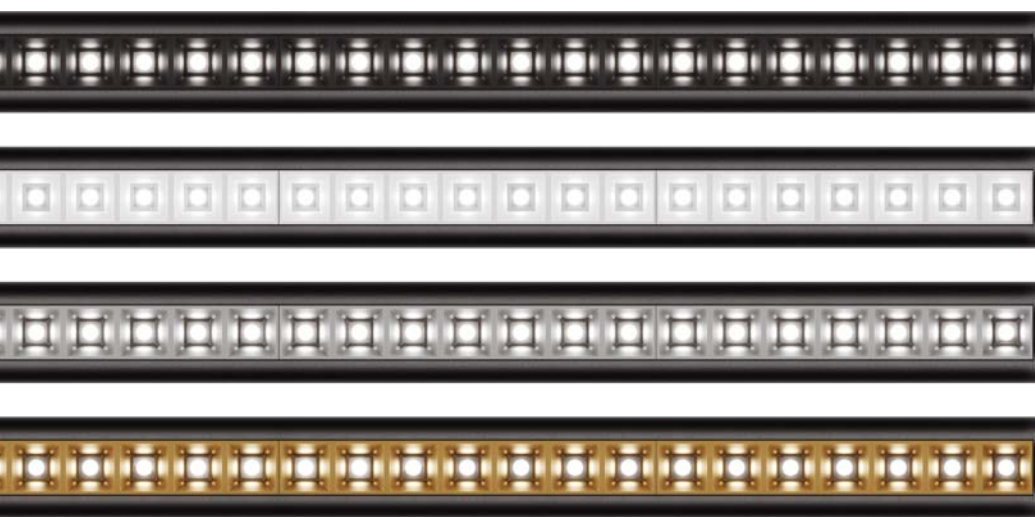

Black matte

White matte

Silver matte

Gold matte

With a 75 mm diameter, you can create your unique office lighting story.



EN The Line 75 Oval Dark Optics luminaire, featuring a 75 mm diameter, blends modern aesthetics with advanced functionality, making it perfect for enhancing lighting in conference rooms and workstations. Designed for precise illumination, it offers direct and indirect light that promotes uniformity and reduces glare, creating an optimal environment. The innovative dark optics provides even light distribution across multiple output levels and color temperatures, meeting diverse lighting requirements, even 165,3 lm/W. Its powder-coated housing ensures both durability and a refined appearance, while the option to customize the housing with any RAL color allows for personalized design.

DE The Line 75 Oval Dark Optics mit einem Durchmesser von 75 mm verbindet moderne Ästhetik mit fortschrittlicher Funktionalität und eignet sich perfekt zur Verbesserung der Beleuchtung in Konferenzräumen und an Arbeitsplätzen. Sie wurde für eine präzise Beleuchtung entwickelt und bietet ein direktes und indirektes Licht, das die Gleichmäßigkeit fördert und die Blendung reduziert, wodurch eine optimale Umgebung geschaffen wird. Der innovative dark optics sorgt für eine gleichmäßige Lichtverteilung über mehrere Leistungsstufen und Farbtemperaturen und erfüllt so die unterschiedlichsten Beleuchtungsanforderungen. Der pulverbeschichtete Rahmen sorgt für Langlebigkeit und ein edles Erscheinungsbild, während die Möglichkeit, das Gehäuse in jeder RAL-Farbe zu gestalten, ein individuelles Design ermöglicht.

77+□-■-~-▲-○-⬠-*

Line 75 Oval
Dark Optics

dark
optic
80°

standard
power

3000K

reflector
black matte

↑

77 2 3 - 08 - 2 - 8 - 3 - 01 - 01

↓

pendant

size
564 mm

DALI

housing
black 9005

size		↓light	↑light	system power standard	luminous flux 4000K, 80° white
564 mm	■ 08	2ft	2ft	↗9.8W / ↗4.9W	↗1156lm / ↗520lm
844 mm	■ 12	3ft	3ft	↗14.7W / ↗9.8W	↗1734lm / ↗1040lm
1124 mm	■ 16	4 ft	4ft	↗19.6W / ↗14.7W	↗2312lm / ↗1559lm
1404 mm	■ 20	5ft	5ft	↗24.5W / ↗19.6W	↗2890lm / ↗2079lm
1684 mm	■ 24	6 ft	6ft	↗29.4W / ↗24.5W	↗3468lm / ↗2599lm
1964 mm	■ 28	7ft	7ft	↗34.3W	↗4046lm
2244 mm	■ 32	8 ft	8ft	↗39.2W	↗4624lm
2524 mm	■ 36	9 ft	9ft	↗44.1W	↗5202lm
2804 mm	■ 40	10ft	10ft	↗49W	↗5780lm
3084 mm	■ 44	11ft	11ft	↗53.9W	↗6358lm
3364 mm	■ 48	12ft	12ft	↗58.8W	↗6936lm

UGR	<19			
lighting power	low	~ 1		
	standard	~ 2		
	high	~ 3		
mounting type	pendant	+ 2		
	pendant up & down	+ 3		
light distribution – down	80° / 50° / 35° / wall washer			
luminous efficiency	LO	ST	HI	
	80°	123lm/W	117lm/W	112lm/W
	50°	119lm/W	114lm/W	108lm/W
electrical control	ON / OFF		▲ 9	
	DALI		▲ 8	
	3000K		● 3	
color temperature	4000K		● 4	
	on request:	TUNABLE WHITE	● 9	
housing color	black 9005		● 01	
	white 9010		● 02	
	on request:	RAL color palette	● 99	
reflector color	black matte		* 01	
	white matte		* 02	
	silver matte		* 04	
	on request:	gold matte	* 05	
dark optics	dark optic 80°		■ 3	
	dark optic 50°		■ 4	
	dark optic 35°		■ 5	
	wall washer		■ 7	
	blind cover		■ 9	

* Photometric data: 4 ft, 4000 K, CRI 90, white reflector

